

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Serial No. : 10/781,218 Confirmation : 1934
Applicant(s) : Kazuya KIMURA et al.
Filed : February 17, 2004
Title : ELECTRIC COMPRESSOR AND METHOD OF ASSEMBLING THE SAME

Art Unit : 3746
Examiner : Philip Earl STIMPERT

Docket No. : 5000-5147
Customer No. : 27123

TRANSMITTAL OF ENGLISH TRANSLATION OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

A certified copy of Priority Document JP 2003-040546 in Japanese was submitted to the USPTO on February 17, 2004. Transmitted herewith are the following items in the above-identified application:


☒ English Translation of Priority Document JP 2003-040546 (22 pages)

☒ The Commissioner is hereby authorized to charge any additional fees which may be required by this paper, or credit any overpayment to Deposit Account No. **13-4500**, Order No. **5000-5147**.

Respectfully submitted,
MORGAN & FINNEGAN, L.L.P.

Dated: March 17, 2008

By:


Steven F. Meyer
Registration No. 35,613

Correspondence Address:

MORGAN & FINNEGAN, L.L.P.
3 World Financial Center
New York, NY 10281-2101
(212) 415-8700 Telephone
(212) 415-8701 Facsimile

[Title of Document] Petition for Patent
[Reference Number] PY20021820
[Filing Date] February 19, 2003
[To] The Commissioner of the Patent Office
[International Patent Classification] F04B 39/00
F04C 29/00
[Inventor]
[Address] c/o KABUSHIKI KAISHA TOYOTA JIDOSHOKKI, 2-1,
Toyoda-cho, Kariya-shi, Aichi-ken
[Name] Kazuya KIMURA
[Inventor]
[Address] c/o KABUSHIKI KAISHA TOYOTA JIDOSHOKKI, 2-1,
Toyoda-cho, Kariya-shi, Aichi-ken
[Name] Masanori SONOBE
[Inventor]
[Address] c/o KABUSHIKI KAISHA TOYOTA JIDOSHOKKI, 2-1,
Toyoda-cho, Kariya-shi, Aichi-ken
[Name] Kitaru IWATA
[Applicant for Patent Application]
[Applicant ID Number] 000003218
[Name] KABUSHIKI KAISHA TOYOTA JIDOSHOKKI
[Agent]
[ID Number] 100068755
[Patent Attorney]
[Name] Hironori ONDA
[Appointed Agent]
[ID Number] 100105957
[Patent Attorney]
[Name] Makoto ONDA
[Amount of Charge]
[Receipt Number for Advance Payment] 002956
[Amount of Payment] 21,000 Yen
[List of Documents Attached]
[Name of Document] Specification 1
[Title of Document] Drawings 1

[Name of Document] Abstract 1

[Number of General Power of Attorney] 9721048

[Official Confirmation Required/Not Required] Required

[TITLE OF DOCUMENT] DESCRIPTION

[Title of Invention] ELECTRIC COMPRESSOR AND METHOD OF
ASSEMBLING THE SAME

[Scope of the Invention]

[Claim 1] An electric compressor, wherein a compression mechanism is accommodated in a compressor housing, wherein the compression mechanism is driven by an electric motor, so that gas is compressed, wherein a circuit cover is joined to an outer surface of the compressor housing, and wherein an accommodating space encompassed by the compressor housing and the circuit cover accommodates a motor driving circuit for driving the electric motor,

the electric compressor being characterized in that the motor drive circuit is attached to the circuit cover.

[Claim 2] The electric compressor according to claim 1, being characterized in that the motor driving circuit includes a circuit board and a switching element mounted on a surface of the circuit board that is opposite to the circuit cover, wherein the switching element is pressed against the compressor housing by tightening the motor driving circuit between the compressor housing and the circuit cover in the accommodating space on the basis of the fixed joining of the circuit cover to the compressor housing.

[Claim 3] A method of assembling an electric compressor, wherein a compression mechanism is accommodated in a compressor housing, wherein the compression mechanism is driven by an electric motor, so that gas is compressed, wherein a circuit cover is joined to an outer surface of the compressor housing, and wherein an accommodating space encompassed by the compressor housing and the circuit cover accommodates a motor driving circuit for driving the electric motor,

the method being characterized in that, after the circuit cover is attached to the motor driving circuit, the

circuit cover is joined and fixed to the compressor housing.

[DETAILED DESCRIPTION OF THE INVENTION]

[0001]

[Technical Field of the Invention]

The present invention relates to an electric compressor used in, for example, a vehicle air conditioner and a method of assembling this electric compressor.

[0002]

[Prior Art]

An electric compressor of this kind comprises an inverter mounted on a surface of a compressor housing to drive an electric motor, and a circuit cover covering the inverter (for example, Japanese Laid-Open Utility Model No. 62-12471). Specifically, the technique in this publication employs an assembly procedure of mounting the inverter on the surface of the compressor housing and then fixedly joining the circuit cover to the compressor housing to cover the inverter.

[0003]

[Patent Document 1]

CD-ROM of Japanese Laid-Open Utility Model Publication No. 62-12471 (page 1, Fig. 1)

[0004]

[Problems that the Invention is to Solve]

However, the inverter must be handled gently and carefully partly because electric parts and a circuit board have low impact resistance. Accordingly, in terms of the configuration and flow of a production line, the inverter is not compatible with the process of assembling the mechanical components of the electric compressor, with which process the mechanical components do not need to be handled as delicately as the inverter. Therefore, to carefully and reliably mount the inverter on the compressor housing, it is necessary to, for example, execute this process on a line separate from a line on which a process of assembling mechanism components is executed. However, in this case, the compressor housing, a large-sized component, must be moved between the lines. This requires much labor and time. Thus disadvantageously, the manufacturing costs of the electric compressor increase.

[0005]

It is an object of the present invention to provide an electric compressor that reduces manufacturing costs as well as a method of assembling the electric compressor.

[0006]

[Means for Solving the Problems]

To achieve the foregoing objective, an electric compressor according to claim 1 of the present invention has a motor driving circuit attached to a circuit cover. Therefore, for example, the circuit cover may be joined and fixed to the compressor housing after the circuit cover is attached to the motor driving circuit. This procedure has the following advantages.

[0007]

That is, for example, even if the motor driving circuit is attached to the circuit cover member on a line separate from a line on which the circuit cover is fixedly joined to the compressor housing, the circuit cover (including the motor driving circuit), which is a small part, can be easily moved between the lines. Furthermore, the motor driving circuit is reinforced by the circuit cover member. Accordingly, even when the circuit cover is fixedly joined to the compressor housing, it is unnecessary to give special considerations as required if for example, only the motor driving circuit is handled. Consequently, the process of fixedly joining the circuit cover member to the compressor housing can be easily incorporated into an assembly line for the mechanism parts of the electric compressor. Therefore, the manufacturing costs of the electric compressor can be reduced compared to the technique in Patent Document 1.

[0008]

According to the invention of claim 2, which is based on claim 1, the motor driving circuit includes a circuit board and a switching element mounted on a surface of the circuit board that is opposite to the circuit cover. The switching element is pressed against and brought in close contact with the compressor housing by tightening the motor driving circuit between the compressor housing and the circuit cover in the accommodating space on the basis of the fixed joining of the circuit cover to the compressor

housing. Such pressing of the switching element against the compressor housing allows an efficient heat exchange between the switching element and the compressor housing, the temperature of which is relatively low. This improves the heat radiation performance of the switching element, and stabilizes the operation of the motor driving circuit.

[0009]

As described above, the pressing of the switching element against the compressor housing is achieved by tightening the motor driving circuit between the compressor housing and the circuit cover in the accommodating space on the basis of the fixed joining of the circuit cover to the compressor housing. Consequently, it is unnecessary to attach the switching element directly to the compressor housing by bolting or the like in order to allow the switching element to more appropriately radiate heat, as described in, for example, Patent Document 1. This makes it possible to attach the motor driving circuit to the circuit cover. Therefore, the assembly procedure according to claim 1 can be employed, which attaches the motor driving circuit to the circuit cover member and then fixedly joins the circuit cover member to the compressor housing.

[0010]

Specifically, according to the present invention, it is possible to reduce the manufacturing costs of the electric compressor employing the above assembly procedure and to allow the switching element to more appropriately radiate heat by tightly contacting the switching element with the compressor housing.

[0011]

To achieve the foregoing objective and in accordance with a method of assembling an electric compressor according to claim 3, a circuit cover is joined and fixed to a compressor housing after the circuit cover is attached to the motor driving circuit.

[0012]

Therefore, for example, even if the motor driving circuit is attached to the circuit cover member on a line separate from a line on which the circuit cover is fixedly joined to the compressor housing, the circuit cover (including the motor driving circuit), which is a small part, can be easily moved between the lines. Furthermore, the motor driving circuit is reinforced by the circuit cover member. Accordingly, even when the circuit cover is fixedly joined to the compressor housing, it is unnecessary to give special considerations as required if for example, only the motor driving circuit is handled. Consequently, the process of fixedly joining the circuit cover member to the compressor housing can be easily incorporated into an assembly line for the mechanism parts of the electric compressor. Therefore, the manufacturing costs of the electric compressor can be reduced compared to the technique in Patent Document 1.

[0013]

[Embodiments]

An electric compressor and a method of assembling the electric compressor according to first and second embodiment of the present invention will now be described. The electric compressor constitutes a part of a refrigeration circuit of a vehicle air conditioner. In the second embodiment, description will be given only of a difference between the first embodiment and the second embodiment. The same or corresponding components are denoted by the same reference numerals, and their description is omitted.

[0014]

First Embodiment

As shown in FIGS. 1 and 2, a compressor housing 11 constituting the contour of an electric compressor 10 according to the first embodiment is composed of a first housing member 21 and a second housing member 22. The first housing member 21 is shaped generally like a cylinder having a bottom formed on a left side of a peripheral wall 23, as viewed in the figures. The first housing member 21 is made by die casting an aluminum alloy. The second housing member 22 is shaped like a covered cylinder forming a cover on the right of the figures. The second housing member 22 is made

by die casting an aluminum alloy. A closed space 24 is formed in the compressor housing 11 by fixedly joining the first housing member 21 and the second housing member 22 to each other.

[0015]

As shown in FIG. 1, a rotary shaft 27 is rotatably supported by the first housing member 21 in the closed space 24 of the compressor housing 11. A rotation central axis L of the rotary shaft 27 constitutes a central axis L of the electric compressor 10. The peripheral wall 23 of the first housing member 21 is arranged so as to surround the central axis L of the electric compressor 10.

[0016]

An electric motor 12 and a compression mechanism 14 are accommodated in the closed space 24 of the compressor housing 11. The electric motor 12 is composed of a stator 12a fixed to the inner surface of the peripheral wall 23 of the first housing member 21 and a rotor 12b provided inside the stator 12a and around the rotary shaft 27. The electric motor 12 rotates the rotary shaft 27 by allowing the stator 12a to receive a power supply.

[0017]

The compression mechanism 14 is of a scroll type comprising a fixed scroll member 14a and a movable scroll member 14b. In the compression mechanism 14, the movable scroll member 14b orbits relative to the fixed scroll member 14a in response to rotation of the rotary shaft 27 to compress a refrigerant gas. Accordingly, when the compression mechanism 14 is driven by the electric motor 12, a low-temperature and low-pressure refrigerant gas from an external refrigerant circuit (not shown) is sucked into the compression mechanism 14 from a suction port 31 (see FIG. 2) formed in the first housing member 21, via the electric motor 12. The refrigerant gas sucked into the compression mechanism 14 is converted into a high-temperature and high-pressure refrigerant gas by a compressing action of the compression mechanism 14. The refrigerant gas is then discharged to the external refrigerant circuit through an exhaust port 32 formed in the second housing member 22.

[0018]

The refrigerant gas from the external refrigerant circuit is introduced into the compression mechanism 14 via the electric motor 12 so that this relatively cool refrigerant gas cools the electric motor 12 and a motor driving circuit 41, described later.

[0019]

As shown in FIGS. 2 and 3, an accommodating section 36 containing an accommodating space 35 is projected from a part of the outer surface of the peripheral wall 23 of the

first housing member 21. The accommodating section 36 is composed of a frame-like side wall portion 37 integrally extended from the outer surface of the peripheral wall 23 and a cover member 38. The cover member 38 is fixedly joined to an end surface of the side wall portion 37, and is separate from the compressor housing 11. The cover member 38 functions as a circuit cover. The cover member 38 is fixed to the side wall portion 37 at its four corners using bolts 39.

[0020]

As shown in FIG. 3, a bottom surface 35a of the accommodating space 35 is constituted by the outer surface of the peripheral wall 23. Specifically, the bottom surface 35a of the accommodating space 35 is provided by the first housing member 21. A top surface 35b of the accommodating space 35 is provided by the cover member 38.

[0021]

A motor driving circuit 41 for driving the electric motor 12 is accommodated in the accommodating space 35 of the accommodating section 36. The motor driving circuit 41 is composed of an inverter to supply power to the stator 12a of the electric motor 12 on the basis of an instruction from an air conditioner ECU (not shown).

[0022]

The motor driving circuit 41 is composed of a planar circuit board 43 and plural types of electric components 44 mounted on a surface 43a of the circuit board 43 which is closer to the central axis L and on an opposite surface 43b. The reference number 44 of these electric components generally refers to electric components 44A to 44E, described later, and other electric components not shown in the drawings.

[0023]

The electric components 44 include well-known components constituting inverters, that is, switching elements 44A, an electrolytic capacitor 44B, a transformer 44C, a driver 44D, and a fixed resistor 44E. The driver 44D is an IC chip that intermittently controls the switching element 44A on the basis of instructions from the air conditioner ECU.

[0024]

Only the electric components 44 that are lower than the switching elements 44A (provided that the switching elements 44A are arranged on the surface 43b) as measured from the circuit board 43 (from the surface 43b) are arranged on the

surface 43b that is opposite the central axis L, i.e., closer to the cover member 38. The electric components 44 that are lower than the switching elements 44A as measured from the circuit board 43 include, for example, the driver 44D and the fixed resistor 44E.

[0025]

The plurality of switching elements 44A and the electric components 44 that are higher than the switching elements 44A as measured from the circuit board 43 (from the surface 43a) are arranged on the surface 43a of the circuit board 43, which is closer to the central axis L, i.e. opposite the top surface 35b of the cover member 38. The electric components 44 that are higher than the switching elements 44A as measured from the circuit board 43 include, for example, the electrolytic capacitor 44B and the transformer 44C.

[0026]

The low electric components such as the switching element 44A are arranged in a central portion of the surface 43a of the circuit board 43 which portion is close to the central axis L. The high electric capacitors such as the electrolytic capacitor 44B and the transformer 44C are arranged on both sides of the central portion of the surface 43a of the circuit board 43 which sides are further from the central axis L. This arrangement enables the motor driving circuit 41 to be installed in the compressor housing 11 so that the electric components 44 mounted on the surface 43a of the circuit board 43 extend along the cylindrical shape of the peripheral wall 23.

[0027]

Accordingly, the motor driving circuit 41 can be arranged close to the central axis L of the electric compressor 10 because the electric components 44 extend along the cylindrical shape of the peripheral wall 23. Therefore, the amount of projection of the accommodating section 36 from the compressor housing 11 is reduced to miniaturize the electric compressor 10.

[0028]

A central area 35a-1 of the bottom surface 35a of the accommodating space 35 corresponds to the switching elements 44A and is constructed as a plane that is close to the cover member 38 and parallel with the top surface 35b. Areas of the bottom surface 35a of the accommodating space 35 which areas are located at respective sides of the area 35a-1 correspond to the high electrolytic capacitor 44B and the transformer 44C. Concave portions 35a-2 are formed in these areas to accommodate the electrolytic capacitor 44B and the transformer 44C, respectively, such that clearance exists about each of the electrolytic capacitor 44b and the

transformer 44C.

[0029]

The motor driving circuit 41 is fixed in the accommodating space 35 because the vicinities of the switching elements 44A are tightened between the first housing member 21 and the cover member 38 due to the attachment of the cover member 38 to the first housing member 21. The tightening of the motor driving circuit 41 between the first housing member 21 (the bottom surface 35a of the accommodating space 35) and the cover member 38 (top surface 35b) causes the switching elements 44A of the circuit 41 to be pressed against the bottom surface 35a (area 35a-1) of the accommodating space 35 at a radiating surface 44A-1 of the switching element 44A.

[0030]

Consequently, heat is efficiently exchanged between the switching elements 44A and the first housing member 21 (peripheral wall 23), which is relatively cool because a sucked refrigerant gas flows inside the peripheral wall 23. This allows heat to be appropriately radiated from the switching element 44A to stabilize operations of the motor driving circuit 41.

[0031]

A circuit board support member 47 made of resin is mounted on the surface 43b of the circuit board 43, which is opposite the central axis L, so that all the electric components 44 mounted on the surface 43b are buried in the circuit board support member 47. Consequently, a load imposed on the switching element 44A by the pressing of the elements 44A against the bottom surface 35a of the accommodating space 35 is received by the cover member 38 via the circuit board 43 and the circuit board support member 47. Therefore, the flexure of the circuit board 43 near the switching elements 44A, which is caused by the above load, is prevented by direct backup support by the circuit board support member 47.

[0032]

A rubber sheet (elastic member) 45 that is excellent in resilience and heat conductivity is interposed between the switching elements 44A and the bottom surface 35a of the

accommodating space 35 (area 35a-1). That is, the switching elements 44A is pressed against and tightly contacted with the bottom surface 35a of the accommodating space 35 via the sheet 45.

[0033]

Accordingly, even if, for example, a dimensional tolerance causes a variation in height from the circuit board 43 among the switching elements 44A, the elastic deformation of the sheet 45 absorbs a variation in the absolute height of each switching element 44A and a variation in relative height among the switching elements 44A. The switching elements 44A can thus be pressed against and tightly contacted with the first housing member 21 (the bottom surface 35a of the accommodating space 35) with an appropriate force. This allows the switching elements 44A to more appropriately radiate heat and also allows the motor driving circuit 41 to be stably arranged in the accommodating space 35.

[0034]

A plurality of bolts 51 are set in the top surface 35b (cover member 38) of the accommodating space 35 at intervals. A plurality of bolt through-holes 43c are formed through an outer peripheral portion of the circuit board 43 of the motor driving circuit 41 in association with the bolts 51 of the cover member 38. The bolts 51 are inserted through the respective bolt through-holes 43c in the circuit board 43. A nut 52 is attached to the tip of each bolt 51 to lock the motor driving circuit 41 on the cover member 38. That is, the motor driving circuit 41 is attached to the cover member 38 using the bolts 51 and the nuts 52. The motor driving circuit 41 is attached to the cover member 38 before the cover member 38 is fixedly joined to the first housing member 21 (see FIG. 4).

[0035]

As is apparent from the drawings, the nuts 52, attached to the respective bolts 51, simply abut the motor driving circuit 41 against the cover member 38 so as to prevent the motor driving circuit 41 from coming off the bolts 51, i.e., coming off the cover member 38. However, the nuts 52 permit the motor driving circuit 41 to move close to the cover member 38 (top surface 35b). The structure attaching the motor driving circuit 41 to the cover member 38 using the bolts 51 and the nuts 52 does not hinder the vicinities of the switching elements 44A from being tightened directly between the first housing member 21 (bottom surface 35a) and the cover member 38 (top surface 35b).

[0036]

As shown in FIG. 4, it is important to manage the

distance X from the top surface 35b to the radiating surface 44A-1 in the cover member 38 (including the motor driving circuit 41) in order to suitably adjust a force that tightens the motor driving circuit 41 between the first housing member 21 and the cover member 38, that is, a force that presses the switching elements 44A against the bottom surface 35a. In the present embodiment, the distance X is set at a suitable value by adjusting the thickness of the circuit board support member 47 between the surface 43b of the circuit board 43 and the top surface 35b of the cover member 38. That is, the circuit board support member 47 functions as an adjusting member.

[0037]

Specifically, before the cover member 38 is fixedly joined to the first housing member 21, the circuit board support member 47 is formed directly by depositing a resin on the surface 43b of the circuit board 43. The thickness of the circuit board support member 47 is adjusted by tightening the nuts 52 while the resin remains soft (its thickness can be varied) to compress the resin between the motor driving circuit 41 and the cover member 38, while allowing an excess amount of resin to escape to the side of the circuit board support member 47. Then, the resin hardens to determine the thickness of the circuit board support member 47, that is, to set the distance X at a suitable value. Then, the cover member 38 (including the motor driving circuit 41) is fixedly joined to the first housing member 21.

[0038]

The present embodiment, configured as described above, has the following advantages.

(1) The motor driving circuit 41 is attached to the cover member 38. Consequently, an assembly procedure can be employed which attaches the motor driving circuit 41 to the cover member 38 and then fixedly joins the cover member 38 to the first housing member 21. The employment of this assembly procedure produces the following effects.

[0039]

Even if, for example, the motor driving circuit 41 is attached to the cover member 38 on a line separate from a line on which the cover member 38 is fixedly joined to the

first housing member 21, the cover member 38 (including the motor driving circuit 41), which is smaller than the first housing member 21, can be easily moved between the lines. Furthermore, the motor driving circuit 41 is reinforced by the cover member 38. Accordingly, even when the cover member 38 is fixedly joined to the first housing member 21, it is unnecessary to give special considerations as required if for example, only the motor driving circuit 41 is handled. Consequently, the process of fixedly joining the cover member 38 to the first housing member 21 can be easily incorporated into an assembly line for the mechanism parts of the electric compressor 10. Therefore, the manufacturing costs of the electric compressor can be reduced compared to the technique in the utility model publication in the prior art section.

[0040]

(2) The switching elements 44A are pressed against the first housing member 21 by tightening the motor driving circuit 41 between the first housing member 21 and the cover member 38 in the accommodating space 35 on the basis of the fixed joining of the cover member 38 to the first housing member 21. Consequently, it is unnecessary to attach the switching elements directly to the compressor housing by bolting or the like in order to allow the switching elements to more appropriately radiate heat, as described in, for example, the utility model publication in the prior art section. This makes it possible to attach the motor driving circuit 41 to the cover member 38. Therefore, the above assembly procedure can be employed, which attaches the motor driving circuit 41 to the cover member 38 and then fixedly joins the cover member 38 to the first housing member 21.

[0041]

Specifically, according to the present embodiment, it is possible to reduce the manufacturing costs of the electric compressor 10 employing the above assembly procedure and to allow the switching elements 44A to more appropriately radiate heat by tightly contacting the switching elements 44A with the compressor housing 11.

[0042]

Second Embodiment

FIG. 5 shows the second embodiment. In the present embodiment, a spacer 55 is interposed between the cover

member 38 (top surface 35b) and the circuit board support member 47. The distance X of the cover member 38 (including the motor driving circuit 41) is adjusted to a suitable value by adjusting the thickness of the spacer 55 rather than the thickness of the circuit board support member 47.

[0043]

In the present embodiment, first, before the attachment of the motor driving circuit 41 to the cover member 38, the thickness X1 of the vicinities of the switching elements 44A of the motor driving circuit 41 is measured. The thickness X1 of the vicinities of the switching elements 44A of the motor driving circuit 41 is the distance between the tip surface (the top surface in the figure) of the circuit board support member 47 and the radiating surfaces 44A-1 of the switching elements 44A. Then, the spacer 55, the thickness X2 of which corresponds to the difference between the measured value X1 and the preset suitable value of the distance X, is selected from spacers having plural values of thickness. Then, the selected spacer 55 is interposed between the motor driving circuit 41 (circuit board support member 47) and the cover member 38 (the top surface 35b of the accommodating space 35).

[0044]

The selection of the thickness X2 of the spacer 55 need not necessarily meet the equation "(the suitable value of the distance X) - X1 = X2". Any similar value may be used and a slight error is tolerated. That is, even if the selected spacer 55 has a thickness X2 that does not meet the above equation, this error is absorbed by the elastic deformation of the sheet 45 to some degree.

[0045]

The present embodiment has advantages similar to those of the first embodiment. Furthermore, the distance X of the cover member 38 (including the motor driving circuit 41) is adjusted to the suitable value by selecting the spacer 55 to have one of the already provided plural values of thickness. This eliminates the need for a cumbersome operation of fine-tuning the thickness of a soft resin of the circuit board support member 47 at the site where the electric compressor 10 is assembled as in the case of the above described first embodiment. Moreover, the time required to wait for the resin to harden can be saved to reduce the time required to adjust the distance X.

[0046]

It should be understood that the invention may be embodied in the following forms without departing from the spirit or scope of the invention.

In the above embodiments, the bolts 51 and nuts 52 are

used to attach the motor driving circuit 41 to the cover member 38. However, the present invention is not limited to this aspect. The motor driving circuit 41 may be attached to the cover member 38 using snap engagement, an adhesive, a band, or the like.

[0047]

In the above embodiments, the electric compressor 10 is embodied as what is called a fully electric compressor in which the electric motor 12 is the only driving source for the compression mechanism 14. However, the electric compressor 10 may be embodied as, for example, what is called a hybrid compressor in which an engine that is a driving source for the vehicle is used as another driving source for the compression mechanism 14.

[0048]

The compression mechanism 14 is not limited to a scroll type. It may be of, for example, a piston type, a vane type, or a helical type.

The technical ideas obtainable from the above embodiments other than those disclosed in the claim section are described below with their advantages.

[0049]

(1) The electric compressor according claim 2, wherein a circuit board support member, and wherein the circuit board support member is located between the circuit cover and the circuit board of the motor driving circuit, the circuit board support member supporting from back a portion of the circuit board corresponding to each switching element.

[0050]

(2) The electric compressor according to technical idea (1), wherein the thickness of the circuit board support member between the circuit cover and the substrate is adjusted, so that the force by which the switching element is pressed against the compressor housing is adjusted.

[0051]

[Effects of the Invention]

According to the present invention described above, the manufacturing costs of the electric compressor are reduced.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[FIG. 1] A vertical cross-sectional view of an electric compressor;

[FIG. 2] A side view of the electric compressor;

[FIG. 3] A cross-sectional view of FIG. 2 taken along line 1-1 in FIG. 2 and showing that a rotary shaft and an electric motor have been removed;

[FIG. 4] An exploded view illustrating a method of assembling the electric compressor; and

[FIG. 5] An exploded view of an electric compressor showing a second embodiment.

[Description of the Reference Numerals]

10...Electric compressor, 11...Compressor housing, 12...Electric motor, 14...Compression mechanism, 21...First housing member forming compressor housing, 22...Second housing member forming compressor housing, 35...Accommodating space, 38...Cover member serving as circuit cover, 41...Motor driving circuit, 43...Circuit board, 43a...Surface opposite to circuit board, 44A...Switching element.

[TITLE OF THE DOCUMENT] ABSTRACT

[Abstract]


[Problem to be solved] To provide an electric compressor that reduces manufacturing costs.

[Solution] An electric compressor has a compression mechanism accommodated in a compressor housing. The compressor mechanism is driven by an electric motor so as to compress gas. A cover member 38 is joined and fixed to an outer surface of the compressor housing (first housing member 21). An accommodating space 35, which is encompassed by the first housing member 21 and the cover member 38, accommodates a motor driving circuit 41 for driving the electric motor. The motor driving circuit 41 is attached to the cover member 38. The electric compressor is assembled through a procedure in which the cover member 38 is joined and fixed to the first housing member 21 after attaching the motor driving circuit 41 to the cover member 38.

[Selected Drawing] Fig. 3


[Title of Document] Drawings

[Fig. 1]

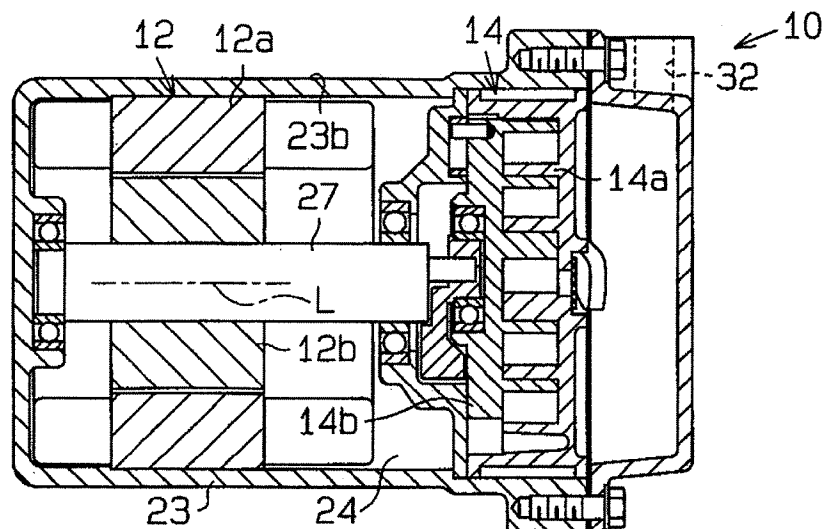


10...Electric Compressor, 11...Compressor Housing
 12...Electric Motor, 14...Compression Mechanism
 21...First Housing Member, 22...Second Housing Member

[Fig. 2]

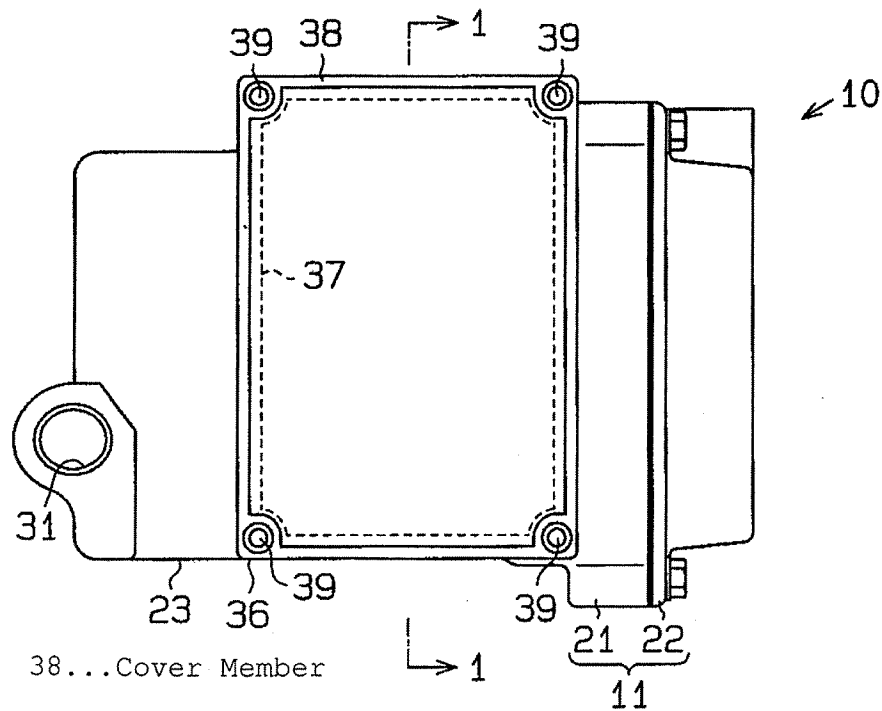

38...Cover Member

[Fig. 3]

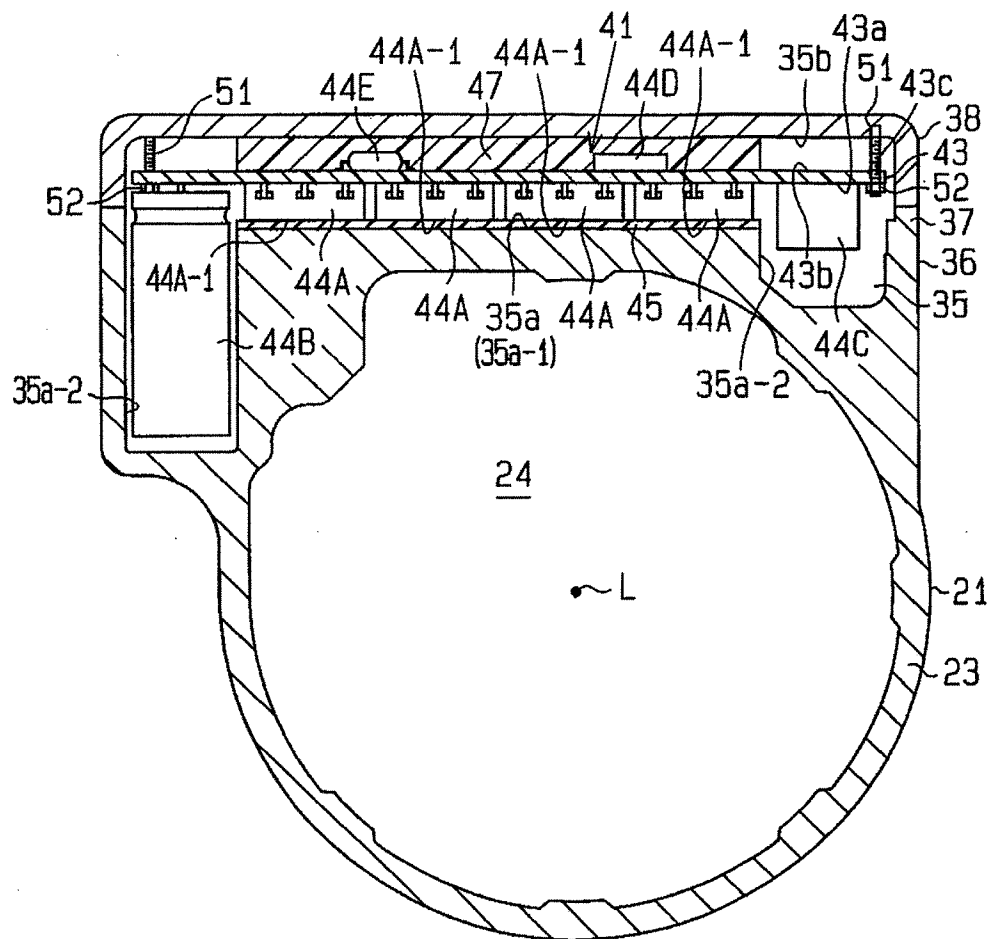

35...Accommodating Space, 41...Motor Driving Circuit
 43...Circuit Board, 43a...Surface opposite to Circuit Board
 44A...Switching Element.

[Fig. 4]

